



C0235T - Lincat Convector Touch Electric Counter-top Convection Oven - W 810 mm - D 850 mm - 4.8 kW

Able to roast, braise, bake and reheat, a C0235T Convector convection oven is a powerful addition to any commercial kitchen.

- ✓ 3 x GN1/1 capacity
- ✓ Touchscreen control with easy-to-use icon-driven menu selections
- ✓ Easy-view traffic light status - see the status of the oven at a glance, even in the noisiest kitchens
- ✓ Space for 24 programs with up to four stages, which can be adjusted individually
- ✓ Up to four-stage phased cooking for perfect results - set temperature, time, fan speed and humidity injection for each stage
- ✓ Even heat distribution thanks to electronically controlled two-speed, bi-directional fan
- ✓ Five levels of humidity injection
- ✓ Nine-hour on-screen timer, with electronic buzzer, and flashing oven lamps to indicate that cycle has finished

Specifications

Summary

Brand	Lincat
Range	Convector
Series	Touch
Power Type	Electric
Unit Type	Counter-top
Available in UK Only	No
UK Warranty	2 Years Parts and Labour Warranty
Export Warranty	Contact your local dealer
GTIN	5056105118299

Power and Performance

Total Power kW	4.8
Temperature Range °C	30-260
IP Rating	IP23
Controls Position	Right hand side
Temperature Control	Electronic
Timer Range mins	1-540
Oven Rating kW	4.6

Key Specifications		Capacity	
--------------------	--	----------	--

Stackable	Yes (with optional kit)	Gastronorm Capacity	3 x GN1/1
Feet Height/Type	55mm/adjustable	Euronorm Capacity	3 x 600 mm x 400 mm
Continuous Plug-In Door Seal	Yes	Shelf Spacing mm	90
Removable Inner Door Glass	Yes	Sheet Pan Capacity	3 x 660 mm x 460 mm
Handle Type	Grab	Capacity Litres	96.0
Vented Door	Yes		
Reversible Door	No		
Door Type	Drop down		
Number of Cooking Phases	4		
Phased Cooking	Yes		
Shelf Timer(s) (Number)	Yes(4)		
Grill Element/Mode	No		
Core Temp Probe	No		
Steam Injection	Yes		
Fan(s) Speed	2		
Fan(s) Type	Bi-Directional		
Number of Fan(s)	1		
Euronorm Compatible	Yes		
Sheet Pan Compatible	Yes		
Removeable Shelf Guides	Yes		
Manual Mode	Yes		
Programmable	Yes		
Number of Programs	24 (4 stages)		
Timer Type	Touchscreen		
Display Type	Touchscreen		
Number of Shelves included	3		
Number of Shelf Positions	3		
Type of Lighting	Halogen Bulb		
Construction/Finish	304 S/S cavity		
GN Compatible	Yes		

Weights and Dimensions		Supply Connections	
------------------------	--	--------------------	--

Unit Height (External) mm	645	Requires Installation	Yes
Unit Width (External) mm	810	Requires Electrical Supply	Yes
Unit Depth (External) mm	850	UK 3 Pin Plug	No
Height (Internal) mm	308	Requires Hardwiring	Yes
Width (Internal) mm	690	Electrical Supply Rating Watts	4,800
Depth (Internal) mm	470	Single Phase Amps	20.5
Shelf Dimensions Width mm	660	Single Phase Voltage	230
Shelf Dimensions Depth mm	425	Three Phase Amps	L1=6.9; L2=6.9; L3=6.9
Net Weight Kg	82	Three Phase Voltage	400
		Water Connection Pressure Bar	2.0-6.0
		Drain Connection	No
		Water Connection	3/4" BSPT
		USB Port	Yes




Shipping	
----------	--

Packed Weight Kg	94.1
Packed Height cm	81.8
Packed Width cm	88
Packed Depth cm	100

Available Accessories	
-----------------------	--

ACIK04	Water Treatment Filter Kit
CO200/FS	Lincat Convector Floor Stand for CO223M/CO223T/CO235M/CO235T Convection Ovens - with 4 Runners - W 810 mm
CO200/LFSK	Lincat Convector Low Floor Stand and Stacking Kit for CO223M/CO223T/CO235M/CO235T Convection Ovens - with 1 Runner - W 810 mm

Technical Picture

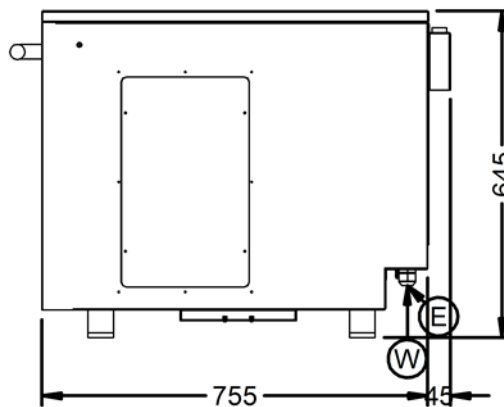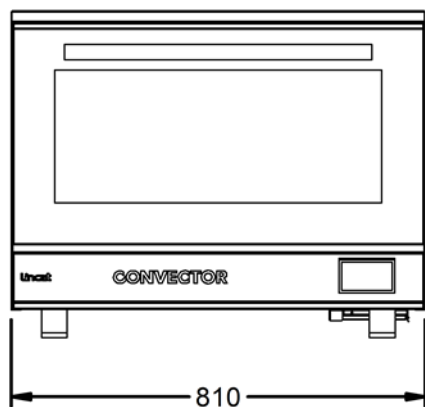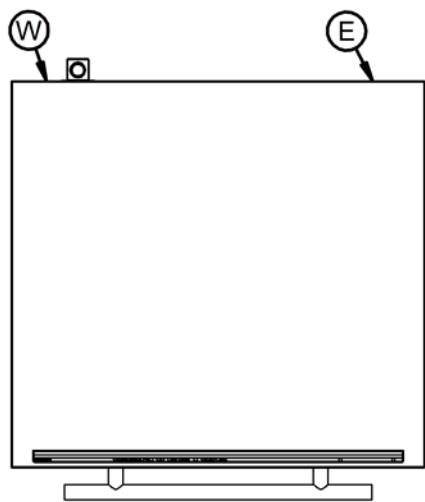

Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm